


375 FINNED STRIP

Efficiently Conducts Heat From Nickel- Chrome Element Wire to the Sheath

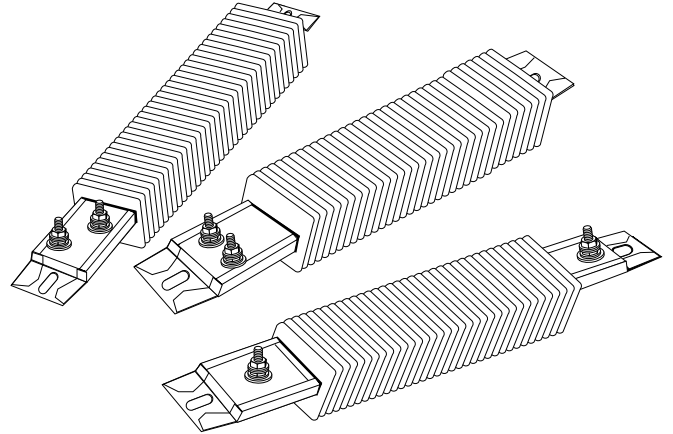


Like its 375 strip counterpart, the 375 finned strip heater is constructed of highly-compacted MgO-based insulation, which conducts heat efficiently from the nickel-chrome element wire to the sheath. Two inch wide (51 mm) aluminized steel fins are attached in a way that maximizes surface contact so that heat is displaced and transferred into the air faster.

Performance Capabilities

- Aluminized steel sheath temperatures to 1100°F (595°C)
- UL® approved to 240V~(ac) (File No. E52951)
- CSA approved to 600V~(ac) (File No. LR7392)

Applications

- Shrink tunnels
- Duct heaters
- Space heaters
- Drying ovens
- Incubators
- Air heating
- Load bank resistors
- Heat curing
- Ink drying
- Food warmers
- Moisture protection
- Process welding
- Dehumidifiers
- Stress relieving ovens

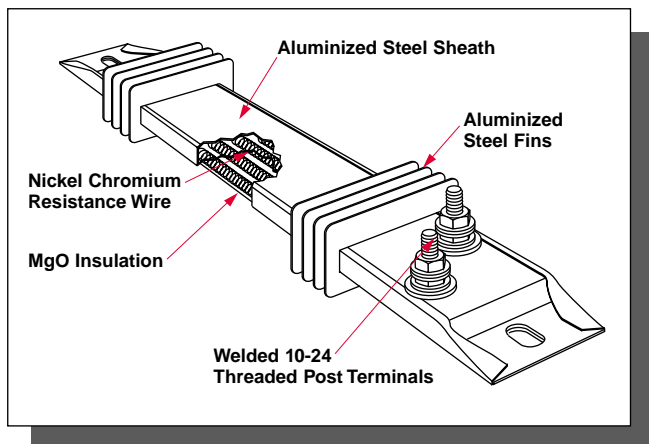

Features and Benefits

Nickel-chrome element wire centered in the heater

- Uniformly heats the strip

Aluminized steel sheath

- Operates at higher temperatures and resists corrosion better than iron-sheathed heaters

Optional 430 stainless steel sheath

- Available for more corrosive environments

Welded post terminals

- Produce strong, trouble-free connections

Rigid 3/8 inch (9.5 mm) thick design

- Enables the 375 finned strip heater to fit many existing applications

Available lengths

- From 5½ inches (140 mm) to 48 inches (1220 mm)



12001 Lackland Road
St. Louis, Missouri 63146 USA
Phone: (314) 878-4600
FAX: (314) 878-6814
Internet: www.watlow.com
e-mail: info@watlow.com


UL® is a registered trademark of Underwriter's Laboratories, Inc.

375 FINNED STRIP

Termination Options


Offset Terminals

Two 10-24 threaded post terminals are offset from each other on the same end.

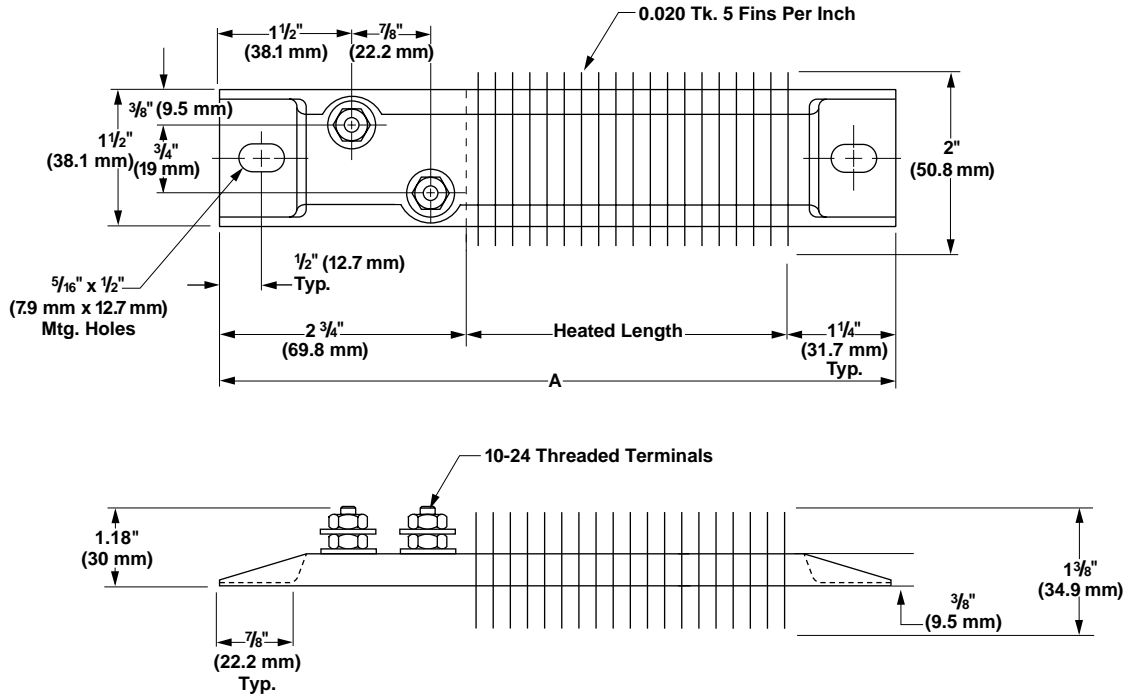

Parallel Terminals

Two 10-24 threaded post terminals are used; both terminals on one end.


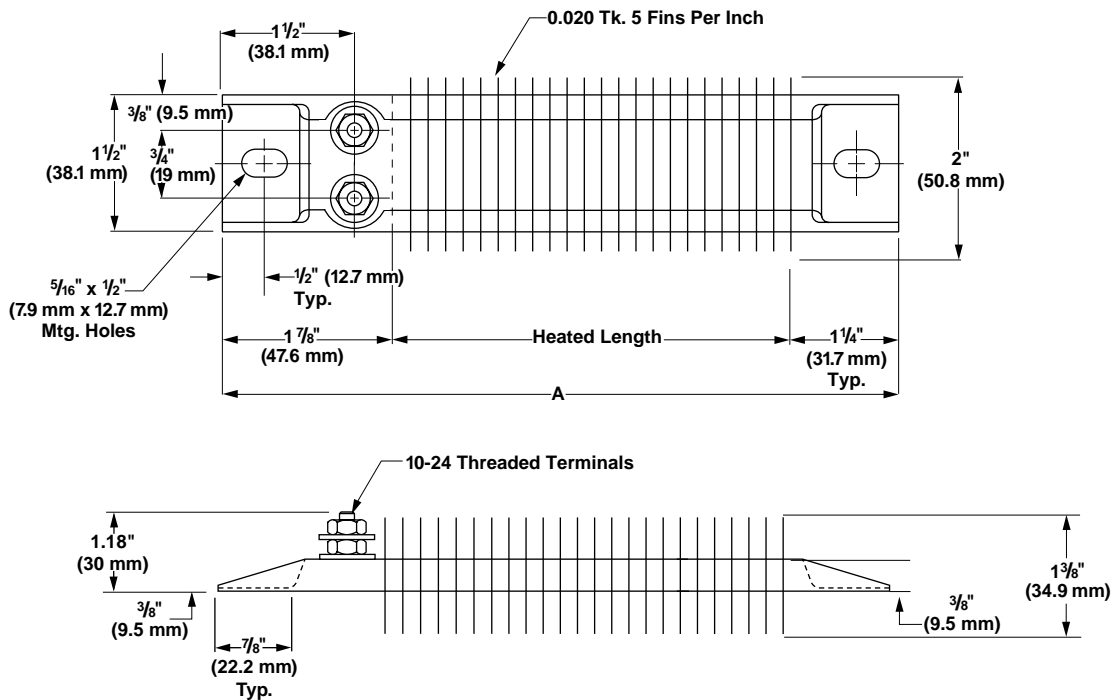


375 FINNED STRIP

Termination Options (continued)


One-on-One Terminals

Two 10-24 threaded post terminals are used; one terminal on each end.

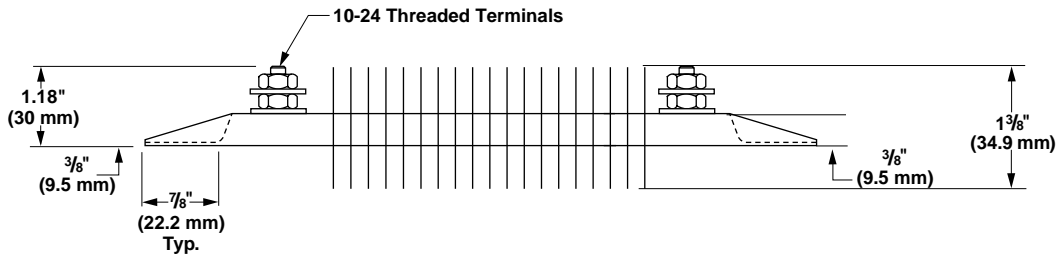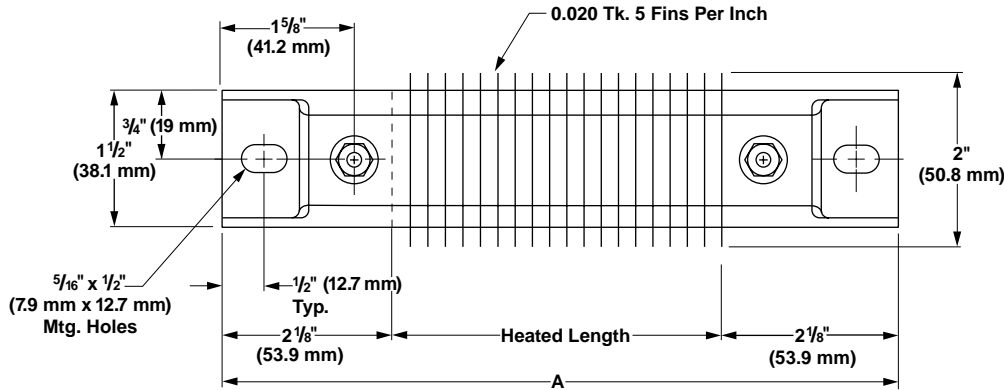

Secondary Insulation Bushings

Insulators are suitable for use when air heating and/or voltage to ground is a concern. Secondary insulation bushing kit contains one set of bushings for one heater. To accommodate the bushings, $1\frac{1}{2} \times \frac{1}{16}$ inch diameter mounting holes must be specified when ordering.

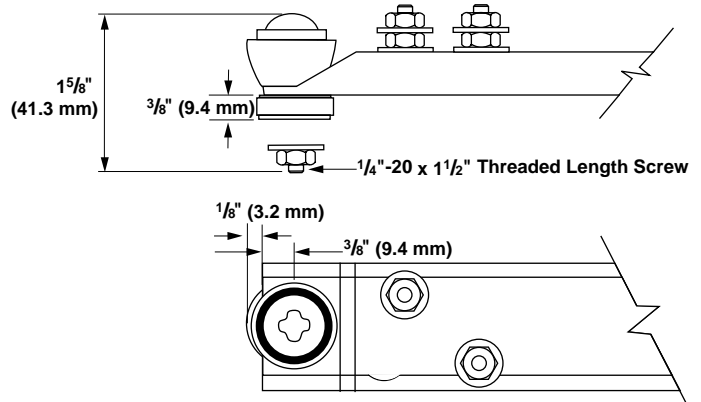

How to Order

To order your stock 375 finned strip, specify:

- 375 finned strip
- Quantity
- Watlow code number (from Watlow Heater's catalog)
- Voltage
- Wattage
- Removal of mounting tabs, if desired

If stock units do not meet application needs, Watlow can manufacture 375 finned strip heaters to your requirements.

For Made-to-Order units, please specify, in addition to above information:

- Width
- Length, including mounting tabs
- Terminal type (offset, parallel or one-on-one)

Availability

- Assembly Stock: Shipment within three working days
- Made-to-Order: Consult a Watlow sales engineer or authorized distributor.